


Deck d'Ober,

Boat deck jointed wood panelling






Bathroom

Deck d'Ober,


Boat deck jointed wood panelling




Dressing room

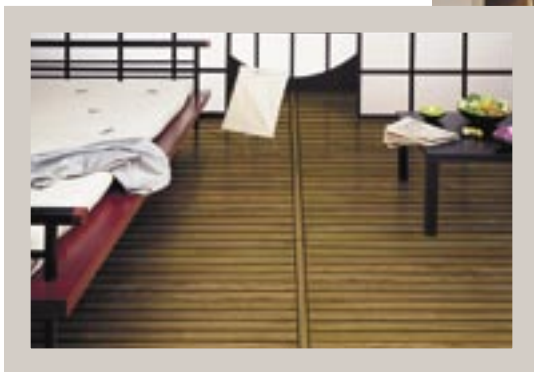

Bedroom



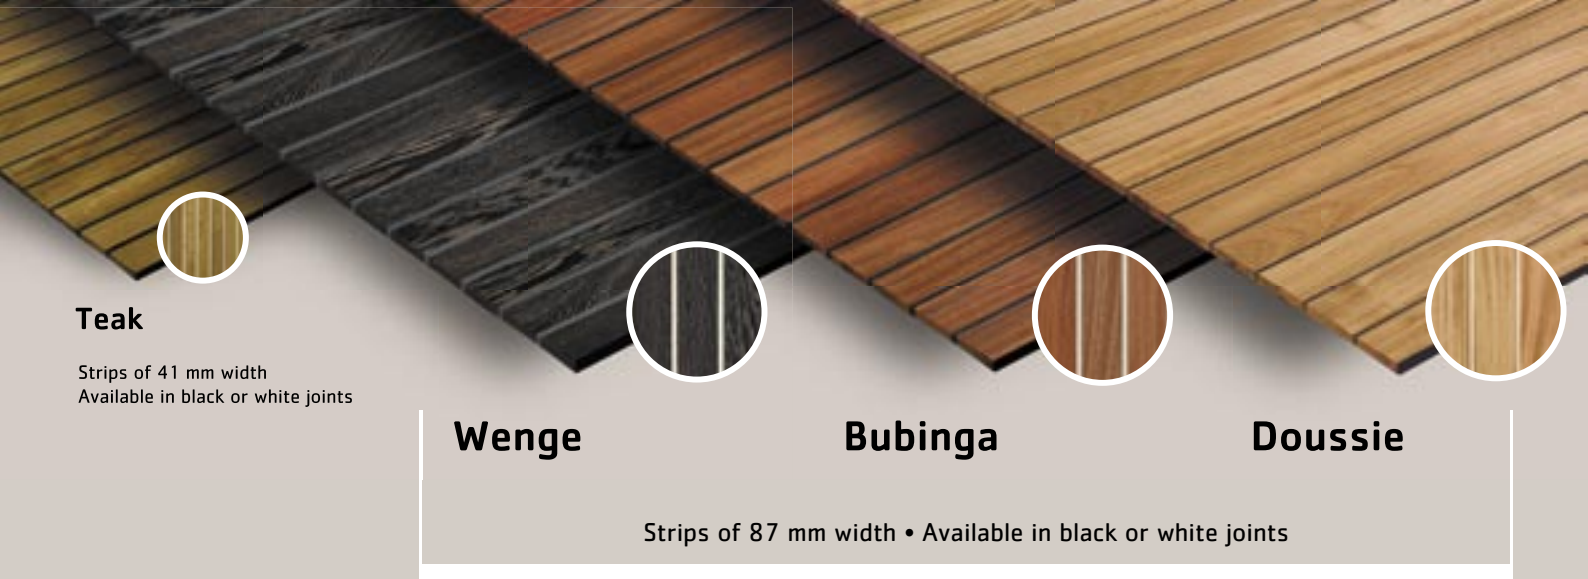

Teak

Strips of 41 mm width
Available in black or white joints

Wenge

Bubinga

Doussie

Strips of 87 mm width • Available in black or white joints


NOVELTIES



Swimming pool



TEAK

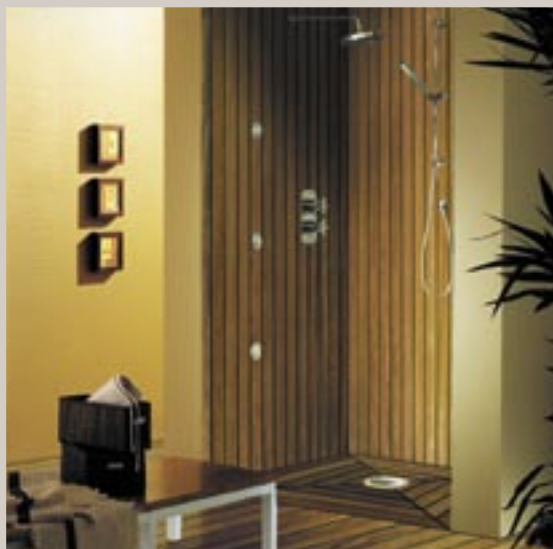

Shower

Characteristics

STRIPS 41 mm WIDTH	Species: solid teak (upon request: solid wenge, bubinga, doussie) Standard lengths: 1200 mm • 2000 mm (lengths on demand: 2200 mm • 2500 mm) Standard widths: 639 mm • 1283 mm
STRIPS 87 mm WIDTH	Species: solid wenge, bubinga, doussie Standard length: 2000 mm (For a length narrower than 2000 mm, please consult us) Standard widths: 639 mm • 1283 mm
SURFACE CONDITION	Product delivered unfinished, to be oiled
THICKNESS OF A STRIP	7,5 mm
JOINT TYPE	elastomer mastic glue
WIDTH OF THE JOINT	5 mm

Additional products

ACCESSORY STRIPS: For the treatment of edges or making thresholds for doors, Oberflex can supply accessory strips in solid wood, length 2000 mm, width 41 or 87*mm and thickness 7,5 mm.

GLUES / MASTICS :

Oberflex can supply glues and mastics for gluing Deck d'Ober and making the joints (see the technical sheet).

* Teak not available in 87 mm strip

Additional information

DECK D'OBBER panels begin with a strip of wood and end with another strip of wood.

Deck d'Ober panels manufactured with 41 mm width solid wood strips can be used for curved surfaces: rounded bathtub surrounds, cladding of columns... (bending radius: 400 mm).

For outside applications or in very humid environment we only recommend the use of Teak wood.

www.oberflex.com



ISO 9001
BUREAU VERITAS
Certification

